

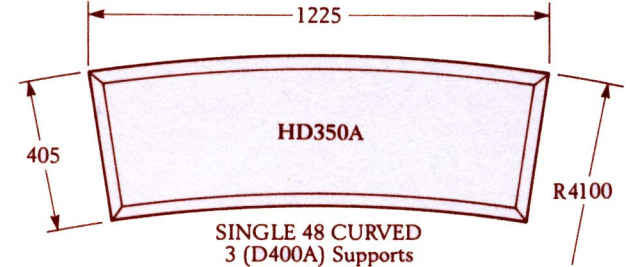
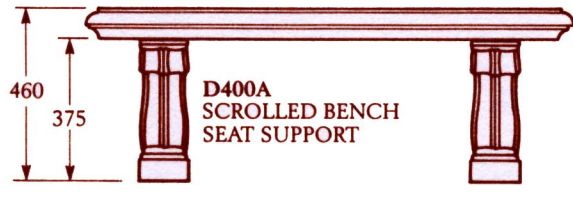
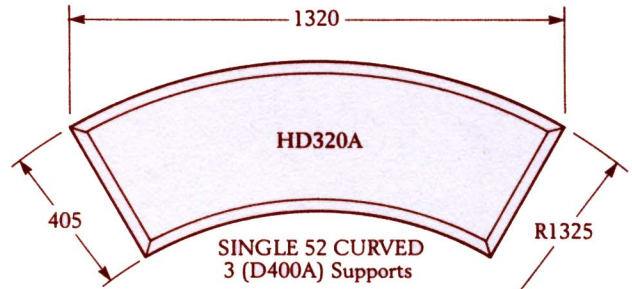
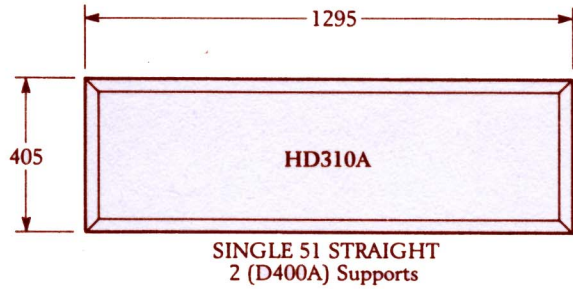
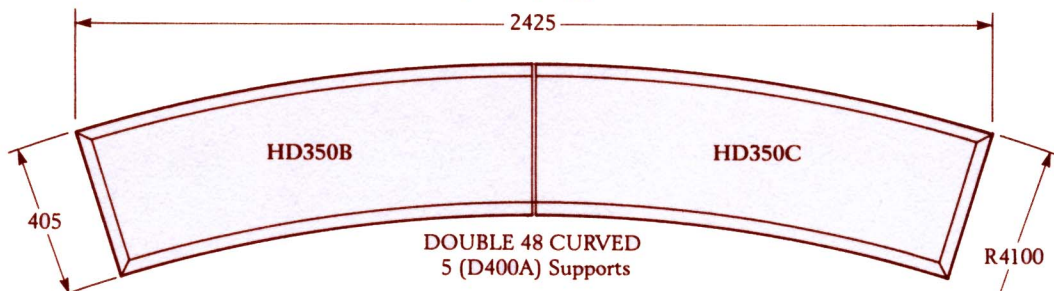
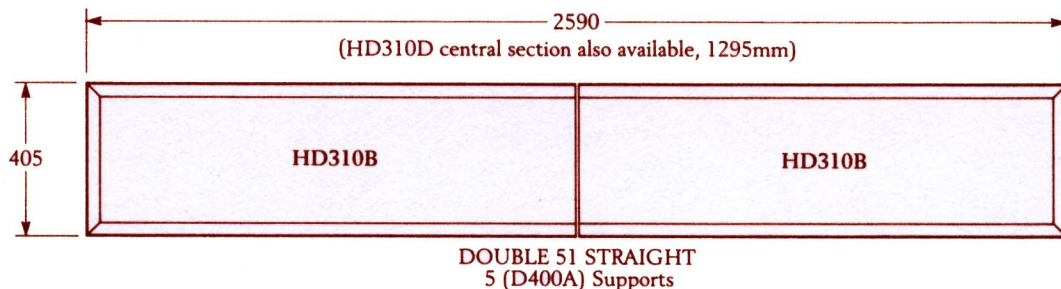


Haddonstone Ltd., The Forge House, East Haddon, Northampton NN6 8DB, UK. Tel: (01604) 770711, Fax: (01604) 770027

**SEATS I
ELEVATIONS AND PLANS**

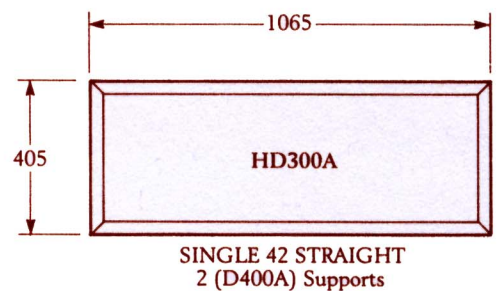

Note: Seat supports D400A and D405A are interchangeable.

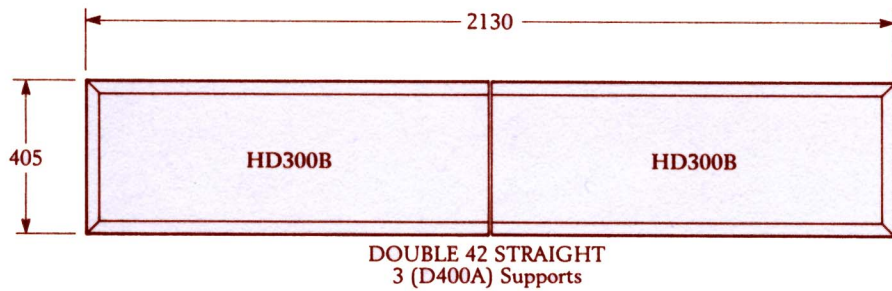

FIXING DETAILS

It is essential that your Haddonstone seat is sited on a firm and level paved area. Although the seat top is reinforced it may crack if subjected to a pivoting or twisting strain. An 8 to 1 sand/cement bedding mortar must be used to ensure that the seat top is uniformly bedded on the supports and that each support is uniformly bedded on the ground. The properties of this mixture give a secure hold which can be broken without difficulty if the seat has to be re-sited. We cannot accept responsibility for breakage if this instruction is ignored.

For weights refer to brochure.

Allow 6mm for bedding joints.

Read in conjunction with tech-sheet M76.

SCALE 1:20